

WATER TANK FITTING WITH SLIDING NUT

OBJECTIVE

This fitting is designed for the correct connection of tanks or cisterns to the network, overflows, collector systems between tank batteries, etc.

APPLICATIONS


The most common applications are plumbing in general, heating, solar energy, thermal installations, cold installations, diesel, and gasoline networks in general.

MATERIALS

The material used for the manufacturing of this product is brass according to EN-12164, EN-12165 or EN-1982

SEALED CONNECTION BY FLAT JOINT

This fitting has been specifically designed and manufactured to provide a seal by means of a flat joint, if a two-piece accessory or any other device is to be threaded together.

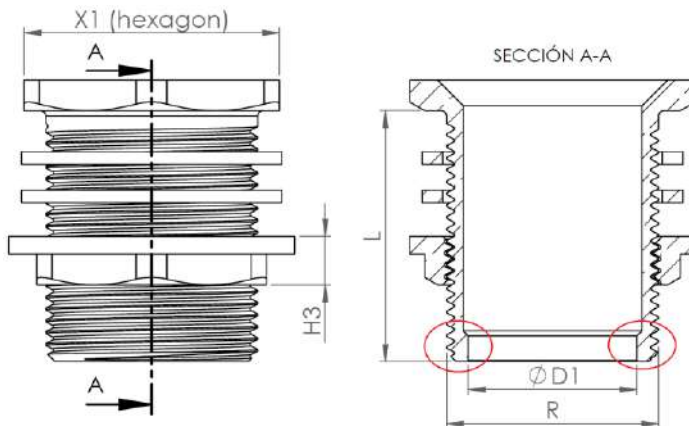

Supplied with 2 EPDM rubber gaskets

Ref.	R	X1	H3	L	ØD1	EAN13
5821160000	3/8"	22,0 mm	7,0 mm	36,5 mm	12,0 mm	8435085508578
5821160100	1/2"	29,0 mm	7,0 mm	40,0 mm	15,5 mm	8435085508585
5821160200	3/4"	35,0 mm	9,0 mm	43,5 mm	21,0 mm	8435085508592
5821160300	1"	42,0 mm	9,0 mm	45,0 mm	26,0 mm	8435085508608
5821160400	1"1/4	50,0 mm	9,5 mm	49,0 mm	33,0 mm	8435085508615
5821160500	1"1/2	58,0 mm	9,5 mm	53,5 mm	39,0 mm	8435085508622
5821160600	2"	70,0 mm	12,0 mm	58,0 mm	49,0 mm	8435085508639
5821160700	2"1/2	90,0 mm	12,0 mm	67,5 mm	62,0 mm	8435085508646
5821160800	3"	105,0 mm	14,0 mm	82,0 mm	75,0 mm	8435085508653

ASSEMBLY INSTRUCTIONS

It is recommended to sweep the entire installation before connecting this fitting.

The fluids must be free of lime and solid particles. Make sure that the fluid is compatible with the materials and characteristics of the fitting.

Make sure that there is no type of leak between the fitting and its connection to the pipe. Verify that the connection to the pipe is free of vibrations and tensions, such as compression, traction, torsion, bending, shear or buckling. Avoid galvanic pairs.

Choose the optimal size of the fitting, according to the installation pipe size and its flow.

It is recommended to carry out periodic checks to ensure that the fitting works normally and there is not leaking or dysfunction.