

STAINLESS STEEL NEEDLE VALVE

AISI 316 STAINLESS STEEL NEEDLE VALVE FOR USE WITH PRESSURE GAUGE

Pressure gauge valves are specially designed to isolate the pressure gauge from the pressure line to be measured, its construction by needle closure allows controlled regulation of the opening of the pressure inlet hole helping to prevent water hammer.

In the case of the 3-way valve, the ¼ "NPT female socket allows the connection of a socket for the verification of the manometer. The holes in your body and key allow the sealing of the installation.

Constructive and functional characteristics


Maximum pressure: they are made and checked for 100 bar maximum pressure

Raw materials: all the components are made using AISI 316 Stainless

Working temperature: -20...+50 ° C.

Pressure gauge connection: ½ " Female Gas

Process connection: ½ " Male NPT

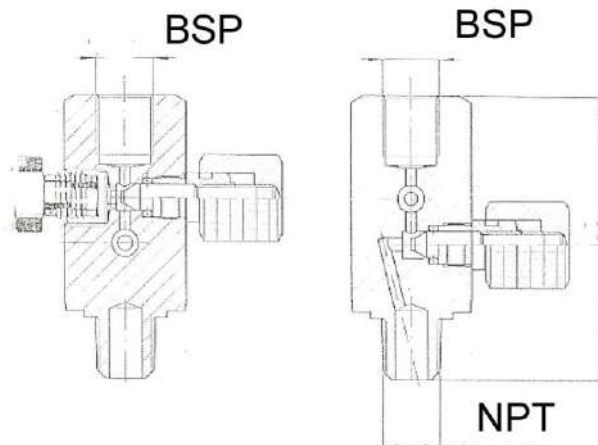

CODE	WAY	PRESSURE GAUGE CONNECTION	PROCESS CONNECTION	HIEGHT
7580320000	3	1/2 " GAS	1/2 " NPT	65 mm

Esta publicación no pretende sentar las bases de un contrato y la empresa se reserva el derecho de modificar sin previo aviso el diseño y las especificaciones de los instrumentos, de acuerdo con su política de continuo desarrollo.